

Learn More

For more information on Honeywell
Spyder Sylk Enhanced and Spyder
Micro Controllers, call **1-800-466-3993** or
visit **beyondinnovation.honeywell.com**.

Automation and Control Solutions

In the U.S.:

Honeywell

1985 Douglas Drive North

Golden Valley, MN 55422-3992

In Canada:

Honeywell Limited

35 Dynamic Drive

Toronto, Ontario M1V 4Z9

In Latin America:

Honeywell

9315 N.W. 112th Avenue

Miami, FL 33178

www.honeywell.com

The Honeywell logo is displayed in a bold, red, sans-serif font.

Spyder® Sylk™ Enhanced


Honeywell



A POWERFUL FAMILY OF UNITARY
AND VAV CONTROLLERS


**Advanced Control From
A Unitary Controller**

PERFECTLY SPUN CONTROL

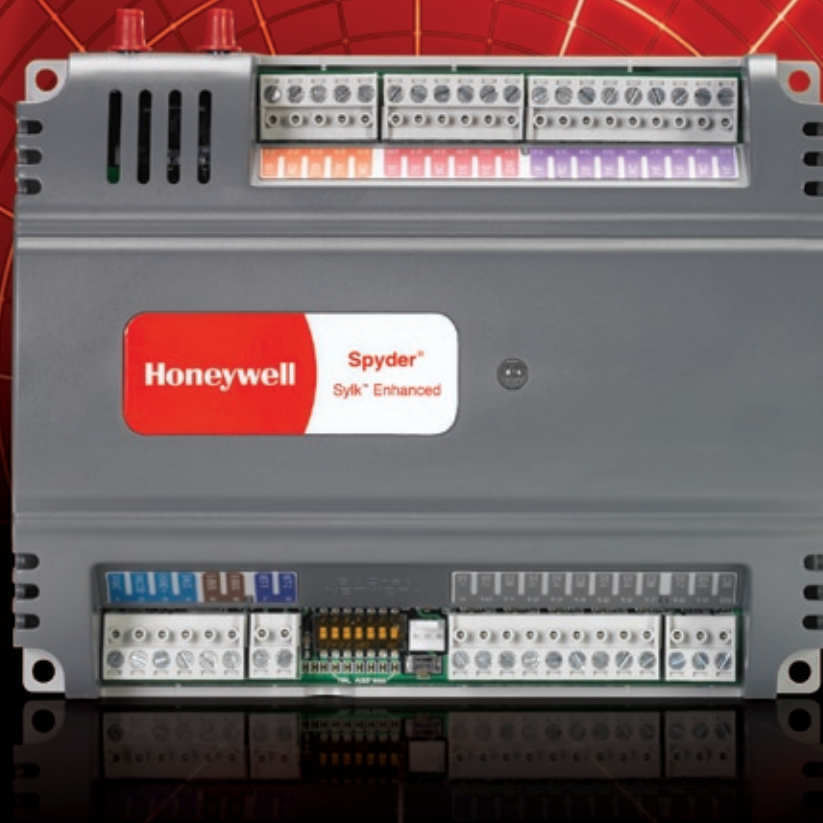

The Power You Need For Advanced Control In The Body Of A Unitary Controller.

The Spyder® Syk™ Enhanced family continues to grow — meeting more application demands. Now select from LonWorks® or BACnet® protocols. Select from standard size Spyder or Spyder Micro, which offers a smaller footprint for tight mounting requirements and reduced I/O count. The Spyder family reduces installation, programming and servicing time all while using a controller that adapts to your application needs rather than forcing you to buy a more expensive plant controller. A two-wire, polarity-insensitive bus lets you easily use the Honeywell Zio™ LCD wall module for even more flexibility.

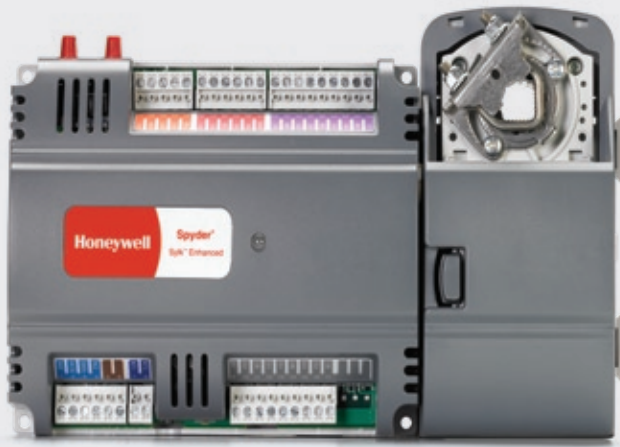

CLASSIC SPYDER

All the popular features of original Spyder controllers are still here and ready to deliver powerful control

Programmable

Spyder Syk Enhanced can be used on a wide variety of equipment types and will give you the flexibility to create almost any application. Just determine what you need done, then program Spyder to control it all.

Removable Terminal Strips

Service and wiring is fast and easy. Removable terminal strips enable wiring when the controller is mounted in hard-to-reach locations. To service, simply unplug the terminals with the wires, replace the controller and plug it all back in.

Color-Coded Input/Output Labels

Connections and troubleshooting are easy with color-coded labels for inputs and outputs. The labels not only ensure that the controller is wired correctly, they also aid with troubleshooting because you can check specific wiring at a glance.

Internal Real-Time Clock

Get unheard-of power in a unitary controller. With Spyder, there's no need to add a separate timing device — a clock is built right in.

Internal DC Power Supply

Spyder controllers come with an internal DC power supply that saves you both the expense of external power and the additional wiring. As long as the load of the transmitter doesn't exceed the power supply's rating, you'll have the exact polarities and power you need.

Integrated Actuator Option

With the optional integrated actuator, you'll save installation time and know you have the right actuator for your VAV application.

Adaptive Integral Algorithm Control

Honeywell's Adaptive Integral Algorithm (AIA) Control is the most accurate control available for space control applications. AIA Control not only reduces the overshoot during control, it ensures that customer comfort is achieved more quickly. As a result, AIA Control diminishes wear on the actuator by reducing the number of times it repositions, increasing the life of the actuator.

The Open System Advantage

Flexibility is a hallmark of Spyder controllers. You won't be locked into closed systems. Instead, the availability of either LonWORKS or BACnet protocols provide the openness and interoperability to use Spyder Syk Enhanced and Spyder Micro controllers with other devices or as a standalone system.

Merging Technology, Comfort And Savings

Count on Spyder controllers for:

- Reliable individual room temperature control
- Advanced control including CO₂, Discharge Air Reset and VAV systems
- Wide application flexibility for unitary control
- Maximum energy savings through time-of-day control, load optimization, occupancy sensor interface with standby setpoints and demand limit control
- Automation savings through pressurization/depressurization, night purge, morning warm-up, terminal regulated air volume and more
- Pressure-independent flow control or pressure-dependent control and wide application flexibility for all VAV and constant volume terminal unit applications

Save Space And Energy

Honeywell Spyder unitary controllers offer flexibility in your system design, don't require a significant amount of building space and help reduce energy costs. The operating temperature rating (-40° to 150° F) means you can mount controllers directly in the control panel of rooftop air-handling units, saving the installation costs of a separate control panel located in a conditioned space.



THE EVOLVING SPYDER SYLK ENHANCED

spins even tighter control.

Enhanced Performance

Spyder Sylk Enhanced retains all the popular features of the original Spyder and enhances them with even more.

Now With BACnet

Whether you prefer LonWorks or BACnet protocols for openness and interoperability, you'll be in great shape with Spyder controllers. You'll enjoy significant cost savings over proprietary systems, and have the flexibility to design exactly what you need to control and monitor any building automation process.

Now With Micro Models

With a smaller form factor and multiple I/O options, Spyder Micro is ideal for retrofit applications, or applications requiring a smaller device footprint.

Multiple Applications Supported

Multiple applications are now supported at every level of the programming architecture, meaning that programmers no longer need to worry that their work will be erased by accidentally dropping an application onto an existing program. Moreover, it means that completely dissimilar applications can coexist on the same wire sheet. For example, a VAV air handler application can exist with a boiler sequencing application. You'll have more flexibility to speed programming and reduce duplicate work.

Full Download Support

You can save time by controlling the type of download to the controller, including full and smart (partial) downloading.

Advanced Variable Air Volume Control

Spyder Sylk Enhanced VAV controllers redefine power and flexibility by providing the most advanced unitary control.

Easy VAV Balancing

Spyder VAV controllers use Honeywell RapidBalance™ for VAV box balancing. RapidBalance is a standalone, easy-to-use, PC-based software program with the ability to drive multiple VAVs to maximum or minimum flow setpoint, as well as drive water valves open or closed for water balancing. This allows all Honeywell Excel 10 VAV controllers and Spyder VAV controllers to be balanced using one simple tool.

Applications

The Spyder VAV controller is designed to meet a wide range of advanced and custom building requirements:

- VAV Box fan speed control
- Room CO₂ control
- VAV discharge air control and low limit
- Pressure-independent or pressure dependent single-duct applications
- Up to three stages reheat
- Floating or PWM reheat and peripheral heat
- Series fan
- Parallel fan
- Return flow tracking
- Pressure-independent or pressure dependent dual duct with or without flow mixing, cold and hot duct flow sensors
- Pressure-independent dual duct, constant volume, cold and hot duct flow sensors
- Pressure-independent dual duct, cold duct airflow sensor only
- Pressure-independent dual duct, constant volume, with discharge airflow sensor only



NEW SPYDER MICRO

For applications that require a smaller footprint, the Spyder Micro has you covered with the same great features. You can't find a more powerful controller in this package size at this price.

Along with offering features in a compact unit, the Spyder Micro includes a 15 Hz Pulse Meter Input for hooking up water, sewage and electricity meters. Also available is a conduit box for meeting code requirements.

WITH EXTENDED REACH

The sensor family offers everything from the latest in LCD digital technology to the basic wall module for temperature sensing only.



ZIO LCD WALL MODULE

The new Zio is the first LCD Wall Module to be compatible via a two-wire, polarity insensitive bus with a Honeywell Direct Digital Control (DDC).

Change Controller Variables

The Zio gives you control like you've never had from a wall module. Almost any variable in the controller can be viewed and modified directly from the wall module.

Two Models

Two models do it all, so you won't need to select from or purchase many different part numbers for different applications. Just remember two easy part numbers: TR70 and TR70-H with humidity output.

Customizable Display

Give end-users a meaningful home screen by configuring the Zio home screen for the specific application and end-user preferences.

Two-Wire Bus

The two-wire bus simplifies wiring and frees up inputs and outputs.

See How it Works

Go to customer.honeywell.com/zio to interact with an online demo of the Zio.



TR20 SERIES WALL MODULES

Bring on just about any temperature control scenario and the new TR20 family of direct-wired wall modules is ready to handle it. Compatible with many Honeywell controllers, including the Spyder family, TR20 wall modules provide the accurate temperature readings and reliability you've come to expect from Honeywell sensors.

Built-In Features

The family features include:

- Space sensor, 20K ohms NTC on most models
- Clean-looking, unobtrusive style
- Easy to adjust

Adaptable

The TR22 and TR23 wall modules are engineered with additional optional features. Model options include:

- Temperature only
- Temperature and humidity
- Three selectable setpoint dials in Fahrenheit, Celsius and Relative (- to +)
- Override button with LED
- LON[®] jack
- 3-position or 5-position fan switch

COST-EFFECTIVE CONTROL AND ABSOLUTE ACCESSIBILITY

When a large medical technology company began constructing new buildings in the Minneapolis, MN area, it had some specific requests. The two sites needed to have reliable indoor CO₂ measurements and a system that allowed them to bring in outdoor air without over-ventilating the buildings. They also wanted a cost-effective standalone controller that could operate independently of the network. Metropolitan Mechanical Contractors (MMC) had the answer.



“ Updates and adjustments are easy to make with this controller. It’s a huge advantage to be able to say that our customers have full off-site support with Spyder. ”

*Chris Koenig
Metropolitan Mechanical Contractors, Inc.
Minneapolis, MN*

BUILDINGS FORUM

Along with technical support and sales materials, Spyder Sylk Enhanced is a key component of the Buildings Forum, established by Honeywell to help channel partners benefit from each other’s experience and knowledge. You’ll find discussion forums, downloadable information and files shared by other contractors.

Get your questions answered, see how other contractors are using Spyder and get tips for getting the most from your Spyder installations by visiting the Buildings Forum at buildingsforum.honeywell.com.

**HONEYWELL ELEARNING ONLINE
MODULES MAKE SPYDER SYLK
ENHANCED TRAINING AVAILABLE 24/7.**

ONLINE TRAINING

The more you know, the more your business can grow. And Honeywell is committed to your success with new Honeywell eLearning Modules available online 24/7, including training on the Spyder controller. Technical training modules for Spyder Sylk Enhanced and other Honeywell commercial products are added frequently, so check back often.

To begin, visit customer.honeywell.com/learning.





SMART FOR NOW. SMART FOR THE FUTURE.

Honeywell Spyder controllers give you affordable, flexible control for today's systems, but they're also designed for control as systems evolve. With everything from plenty of inputs and outputs to built-in DC power to programming flexibility, these controllers will give you cost-efficient control for years to come.

OS #	DESCRIPTION
PUB6438S	Unitary BACnet 6 UI, 4 DI, 3 AO, 8 DO
PVB6436AS	VAV BACnet 6 UI, 4 DI, 3 AO, 6 DO & Actuator
PVB6438NS	VAV BACnet 6 UI, 4 DI, 3 AO, 8 DO
PUL1012S**	Unitary LonWorks 1 UI, 0 DI, 1 AO, 2 DO
PUL4024S**	Unitary LonWorks 4 UI, 0 DI, 2 AO, 4 DO
PUL6438S	Unitary LonWorks 6 UI, 4 DI, 3 AO, 8 DO
PVL0000AS	VAV LonWorks 0 UI, 0 DI, 0 AO, 0 DO & Actuator
YPVL000AS-TR70	VAV LonWorks 0 UI, 0 DI, 0 AO, 0 DO, Actuator & TR70
PVL4022AS**	VAV LonWorks 4 UI, 0 DI, 2 AO, 2 DO & Actuator
PVL4024NS**	VAV LonWorks 4 UI, 0 DI, 2 AO, 4 DO
PVL6436AS	VAV LonWorks 6 UI, 4 DI, 3 AO, 6 DO & Actuator
PVL6438NS	VAV LonWorks 6 UI, 4 DI, 3 AO, 8 DO

* UI - Universal Input, DI - Digital Input, AO - Analog Output, and DO - Digital Output

** One Universal Input (UI-1*) is user selectable as a fast digital pulse meter

